
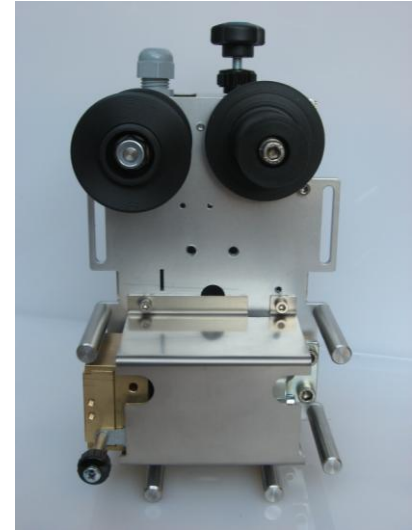


# Thermal Transfer Printer R3000

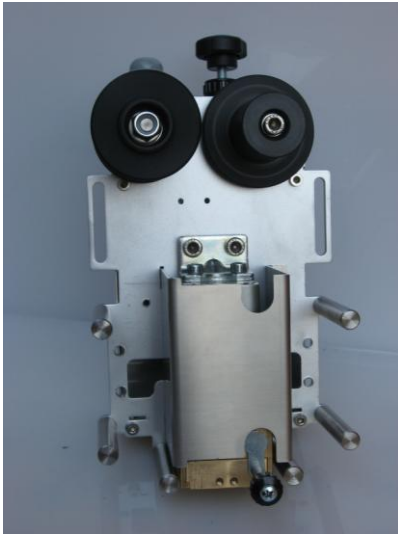

## Technical features:

Overall size:	190x105x110
Printing area:	15x30 mm (head for character can be placed vertical or horizontal)
Type holder groove:	double groove for 5-mm high type, maximum 13 types for every groove
Number of heads:	1
Speed: strokes/min :	up to 50
Thermal transfer ribbon reel: maximum diameter:	80mm
Film speed:	adjustable
Heating resistance	
power supply:	220V 50 Hz
Operating pressure :	4-6 bar
Printing command:	any free contact

### **Electrical junction box: included**

Structure all in Inox AISI 304.

Completely assembled in Italy using components of EU origin only.

A very compact machine designed to be sturdy and reliable; a cylinder resistant to high temperatures leaving stamping and a second cylinder performing the recovery of the tape, both independently adjustable.

The electrical panel holds a card designed in compliance with all the safety requirements envisaged in the European Machinery Directive.

Regulation by means of dedicated delay timers for the starting of printing and duration of the same.

Mechanical adjustments simple.